


製品仕様図

HAS ボルト

仕様図

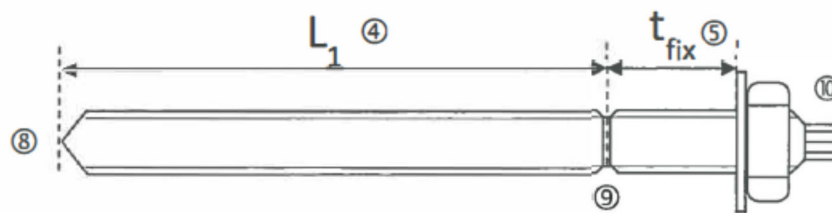

名称	アンカーサイズ	全長	埋め込み部 L_1	取り付け物長さ t_{fix}
HAS-5.8 M8x80/14	M8	110	80	14
HAS-5.8 M8x80/54	M8	150	80	54
HAS-5.8 M10x90/21	M10	130	90	21
HAS-5.8 M10x90/61	M10	170	90	61
HAS-5.8 M10x90/81	M10	190	90	81
HAS-5.8 M12x110/28	M12	160	110	28
HAS-5.8 M12x110/88	M12	220	110	88
HAS-5.8 M12x110/128	M12	260	110	128
HAS-5.8 M12x110/168	M12	300	110	168
HAS-5.8 M16x125/38	M16	190	125	38
HAS-5.8 M16x125/108	M16	260	125	108
HAS-5.8 M16x125/148	M16	300	125	148
HAS-5.8 M16x125/198	M16	350	125	198
HAS-5.8 M16x125/348	M16	500	125	348